

MULTISPLIT AIR CONDITIONERS

MAIN FEATURES



ARGO DUAL 18 DCI R32
ARGO TRIAL 21 DCI R32
ARGO TRIAL 24 DCI R32
ARGO QUADRI 28 DCI R32



X3MI ECO 105SH
X3MI ECO 120SH


Possibility of choice among different capacities and types of indoor units.



HIGH-WALL



CASSETTE



DUCTED



FLOOR/CEILING



CONSOLE



Compact design



Cold air prevention



EASY
Easy maintenance



Timer 24H



Intelligent defrosting



"Turbo" function



Auto diagnosis



High efficiency



Auto restart memory



Child lock



Low voltage start-up



Complete protection



Wide voltage



Action wide range



Central control



Long range monitoring



Wired controller (optional)



DC Inverter technology

A++

Cooling

A+

Heating

LOW AMBIENT COOLING AND HEATING

The ability to work down to -15°C of outdoor temperature, in both cooling and heating modes, ensures a high product reliability: when the outside temperature changes, the compressor frequency and fan speed adjust accordingly.



OUTDOOR UNITS

Model	Code	Cooling capacity (kW)	Heating capacity (kW)
ARGO DUAL 18 DCI R32	398000792	5,30	5,65
ARGO TRIAL 21 DCI R32	398000793	6,10	6,50
ARGO TRIAL 24 DCI R32	398000794	7,10	8,60
ARGO QUADRI 28 DCI R32	398000795	8,0	9,50
X3MI ECO 105SH	398000658	10,5	11
X3MI ECO 120SH	398000659	12	13

INDOOR UNITS

Model	Code
HIGH-WALL	X3I ECO PLUS 27 HL WF
	X3I ECO PLUS 35 HL WF
	X3I ECO PLUS 52 HL WF
	X3I ECO PLUS 70 HL WF
CASSETTE	X3I ECO AS 35 HL
	X3I ECO AS 45 HL
	X3I ECO CASSETTE GRID
DUCTED	X3I ECO SD 25 HL
	X3I ECO SD 35 HL
	X3I ECO SD 52 HL
FLOOR/ CEILING	X3I ECO FC 26 HL
	X3I ECO FC 35 HL
	X3I ECO FC 45 HL
CONSOLE	X3I ECO PLUS AF 27 HL
	X3I ECO PLUS AF 35 HL
	X3I ECO AF 52 HL

CASSETTE



MULTISPLIT INDOOR UNITS



(Standard)
Infrared remote
controller



(Optional)
Wired controller

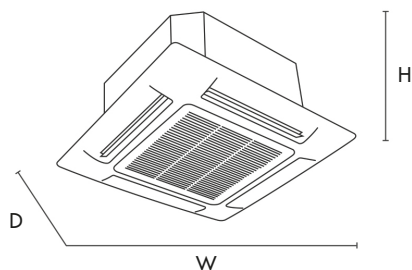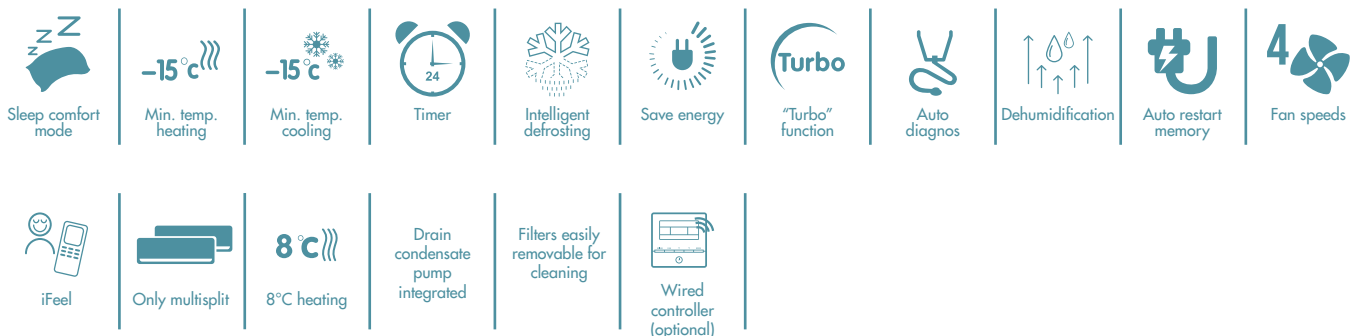

Cassette indoor units		X3I ECO AS35HL		X3I ECO AS45HL	
	Units	Cooling	Heating	Cooling	Heating
Capacity	kW	3,5	4,0	4,5	5,0
Air flowrate (sh.-h.-m.-l.)	m ³ /h	650-560-520-450		710/670/590/450	
Dehumidification	l/h	1,4		1,8	
Fan speeds	n°	3 + auto		3 + auto	
Sound pressure (sh.-h.-m.-l.)	dB(A)	44-41-38-34		47-45-41-35	
Sound power (sh.-h.-m.-l.)	dB(A)	55-52-49-45		58-56-52-46	
Liquid pipe diameter	mm (")	6,35 (1/4")		6,35 (1/4")	
Gas pipe diameter	mm (")	9,52 (3/8")		12,7 (1/2")	
Net dimension without panel (H./W./D.)	mm	240/596/596		240/596/596	
Net dimension panel (H/W/D)	mm	50/670/670		50/670/670	
Net weight without panel	Kg	20		20	
Net weight panel	Kg	3,5		3,5	

CONTROLS

SINGLE AND MULTISPLIT AIR CONDITIONERS

WIRELESS

WIRED

DOOR CONTROL

		High-wall	Cassette	Ducted	Floor/ ceiling	Console
WIRELESS		●				
			●	●	●	
						●
WIRED				●		
	 398100674	●	●	●	●	●
DOOR CONTROL	 398100673	●				

● Standard controller supplied with the unit

● Optional controller
398100674 - Wired control
398100673 Door control