

MULTISPLIT AIR CONDITIONERS

MAIN FEATURES



ARGO DUAL 14 DCI R32
ARGO DUAL 18 DCI R32
ARGO TRIAL 21 DCI R32
ARGO TRIAL 24 DCI R32
ARGO QUADRI 28 DCI R32



ARGO QUADRI 36 DCI R32
ARGO PENTA 42 DCI R32

Possibility of choice among different types of indoor units and many capacity matchings.



HIGH-WALL



CASSETTE

*Wifi through wired controller



DUCTED

*Wifi through wired controller



FLOOR/CEILING



CONSOLE



Compact design



Cold air prevention



EASY
Easy maintenance



Timer



Intelligent defrosting



Turbo
"Turbo" function



Auto diagnosis



High efficiency



Auto restart memory



Child lock



Low voltage start-up



Full protection



Wide voltage range



Wide operating range



Central control



Long-distance monitoring



Wired controller (optional)



DC Inverter technology

A++ Cooling

A+ Heating

LOW AMBIENT COOLING AND HEATING

The ability to work down to -15 °C of outdoor temperature, in both cooling and heating modes, ensures a high product reliability: when the outside temperature changes, the compressor frequency and fan speed adjust accordingly.



OUTDOOR UNITS

Model	Code	Nominal (max.-min.) cooling capacity (kW)	Nominal (max.-min.) heating capacity (kW)
ARGO DUAL 14 DCI R32	398000791	4.10 (2.05-5.00)	4.40 (2.49-5.40)
ARGO DUAL 18 DCI R32	398000792	5.30 (2.14-5.80)	5.65 (2.58-6.50)
ARGO TRIAL 21 DCI R32	398000793	6.10 (2.20-8.30)	6.50 (3.60-8.50)
ARGO TRIAL 24 DCI R32	398000794	7.10 (2.30-9.20)	8.60 (3.65-9.20)
ARGO QUADRI 28 DCI R32	398000795	8.00 (2.30-11.00)	9.50 (3.65-10.25)
ARGO QUADRI 36 DCI R32	398000796	10.60 (2.60-12.00)	12.00 (3.00-14.00)
ARGO PENTA 42 DCI R32	398000797	12.10 (2.60-15.20)	13.00 (3.00-15.50)

INDOOR UNITS

Model	Code
HIGH-WALL	X3I ECO PLUS 27 HL WF 398000817
	X3I ECO PLUS 35 HL WF 398000819
	X3I ECO PLUS 52 HL WF 398000821
	X3I ECO PLUS 70 HL WF 398000823
8-WAY CASSETTE	X3I ECO AS 28 HL 398000860
	X3I ECO AS 35 HL 398000861
	X3I ECO AS 50 HL 398000862
	GRID CASSETTE COMPACT 398100688
	X3I ECO AS 70 HL 398000863
	GRID BIG CASSETTE 398100677
SLIM DUCTED	X3I ECO SD 27 HL 398000856
	X3I ECO SD 35 HL 398000857
	X3I ECO SD 50 HL 398000858
	X3I ECO SD 70 HL 398000859
FLOOR/ CEILING	X3I ECO FC 26 HL 398000666
	X3I ECO FC 35 HL 398000667
	X3I ECO FC 45 HL 398000668
CONSOLE	X3I ECO PLUS AF 27 HL 398000739
	X3I ECO PLUS AF 35 HL 398000741
	X3I ECO PLUS AF 52 HL 398000743

FLOOR/CEILING



MULTISPLIT INDOOR UNITS



(Standard)
Infrared remote
controller



(Optional)
Wired controller
with weekly timer

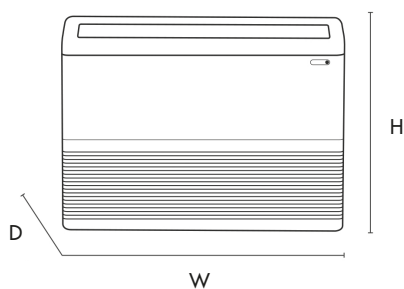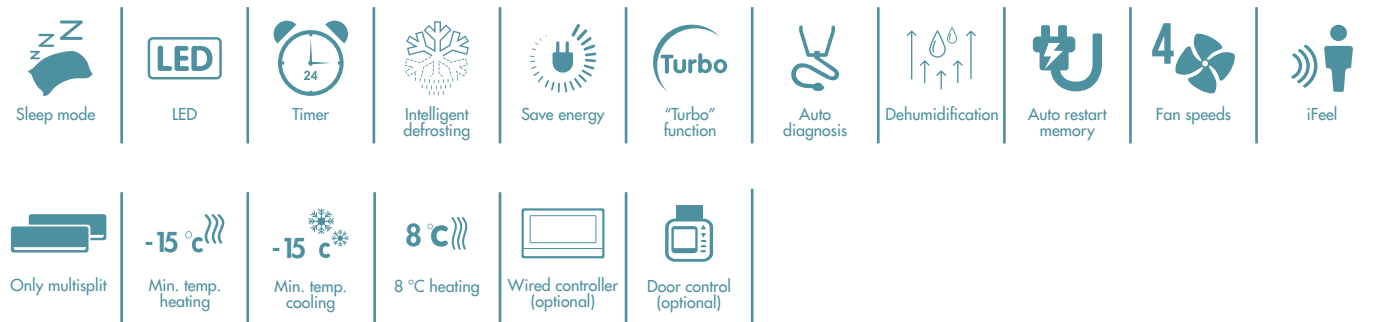

Floor/ceiling indoor units		X3I ECO FC26HL		X3I ECO FC35HL		X3I ECO FC45HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2.60	2.70	3.50	4.00	4.50	5.50
Air flow rate (sh.-h.-m.-l.)	m ³ /h	700-610-540-420		700-610-540-420		700-610-540-420	
Dehumidification	l/h	0.8		1.4		1.8	
Fan speeds	n°	7		7		7	
Sound pressure (sh.-h.-m.-l.)	dB(A)	38-35-30-26		38-35-30-26		38-35-30-26	
Sound power (sh.-h.-m.-l.)	dB(A)	52-49-44-40		52-49-44-40		52-49-44-40	
Liquid pipe diameter	mm (inch)	6.35 (1/4")		6.35 (1/4")		6.35 (1/4")	
Gas pipe diameter	mm (inch)	9.52 (3/8")		9.52 (3/8")		12.7 (1/2")*	
Net dimension Outdoor (H./W./D.)	mm	665/870/235		665/870/235		665/870/235	
Net weight Indoor/Outdoor	kg	25		25		25,5	

*For matching with dual split the adaptor kit (optional) is required

CONTROLS

SINGLE AND MULTISPLIT AIR CONDITIONERS

		High-wall	Cassette	Ducted	Floor/ceiling	Console
WIRELESS		●				
			●	●		
					●	
WIRED						●
	 Wired controller with WiFi		●	●		
	 Wired controller with weekly timer	●	●	●	●	●
DOOR CONTROL	 Contact door control	●	●	●	●	

Code	Description
398100775	Wired controller with WiFi
398100674	Wired controller with weekly timer
398100673	Contact door control

- Standard controller supplied with the unit
- Optional controller